



AUSTRALIAN RAIL TRACK CORPORATION LTD

This document has been adopted by the ARTC with the permission of the NSW Government and will continue to apply under the authority of the ARTC General Manager Infrastructure, Strategy & Performance until further notice

Discipline
Engineering Standard – NSW

Category
Signalling

Title
Bi-Directional Signalling

Reference Number
SDS 08 – (RIC Standard: SC 00 13 01 08 SP)

Document Control

Status	Date	Prepared	Reviewed	Endorsed	Approved
Issue 1 Revision 2	Mar 05	Standards and Systems	Standards Engineer	GM Infrastructure Strategy & Performance	Safety Committee
		Refer to Reference Number	H Olsen	M Owens	Refer to minutes of meeting 12/08/04

DISCLAIMER

Australian Rail Track Corporation has used its best endeavors to ensure that the content, layout and text of this document is accurate, complete and suitable for its stated purpose. It makes no warranties, express or implied, that compliance with the contents of this document shall be sufficient to ensure safe systems of work or operation. Australian Rail Track Corporation will not be liable to pay compensation in respect of the content or subsequent use of this document for any other purpose than its stated purpose or for any purpose other than that for which it was prepared except where it can be shown to have acted in bad faith or there has been willful default.

DOCUMENT APPROVAL

The technical content of this document has been approved by the relevant ARTC engineering authority and has also been endorsed by the ARTC Safety Committee.

DOCUMENT SUPPLY and CONTROL

The Primary Version of this document is the electronic version that is available and accessible on the Australian Rail Track Corporation Internet and Intranet website.

It is the document user's sole responsibility to ensure that copies are checked for currency against the Primary Version prior to its use.

COPYRIGHT

The information in this document is Copyright protected. Apart from the reproduction without alteration of this document for personal use, non-profit purposes or for any fair dealing as permitted under the Copyright Act 1968, no part of this document may be reproduced, altered, stored or transmitted by any person without the prior written consent of ARTC.

About This Standard

This Principle addresses the requirements for the provision and operation of bi-directional signalling over double running line sections.

Document History

Primary Source – RIC Standard SC 00 13 01 08 SP Version 3.0

List of Amendments –

ISSUE	DATE	CLAUSE	DESCRIPTION
1.1	01/09/2004		<ul style="list-style-type: none">▪ Reformatting to ARTC Standard
1.2	14/03/2005	Disclaimer	<ul style="list-style-type: none">▪ Minor editorial change▪ Footer reformatted

Contents

8 Bi-Directional Signalling	6
8.1 Principle No. 8.1 - Bi Directional Signalling	6
8.1.1 Introduction	6
8.1.2 Signalling Arrangements	6
8.1.3 Signalling Controls	6
8.1.4 Maintenance Releases	6
8.1.5 Half – Pilot Staff Inscription	7
8.1.6 Pilot Staff Lock Designation Plate	8

8 Bi-Directional Signalling

8.1 Principle No. 8.1 - Bi Directional Signalling

8.1.1 Introduction

This Principle addresses the requirements for the provision and operation of bi-directional signalling over double running line sections.

8.1.2 Signalling Arrangements

Generally the number of signals provided for the reverse direction of running is considerably less than for the normal direction of running.

Care shall be exercised in ensuring that the signals provided for the reverse direction of running are situated so as not to be confused with the signals provided for the normal direction of running, on the adjacent track. Where provided, reverse direction running signals are to be paired with the normal direction running signals on the adjacent track.

8.1.3 Signalling Controls

If a train is signalled into a bi-directional section from one end then the signal controlling the entrance into the section shall lock the signal controlling the entrance into the section at the opposite end and prove that all intermediate automatic signals controlling movements in the opposite direction to which the train is running are at stop.

In addition the signal controlling the entrance into the section for the reverse direction of running shall prove that the maintenance releases are normal.

If a train is in the bi-directional section then its direction of travel shall be detected by the signalling system and constantly monitored at intermediate signals in order to allow a second train running in the same direction as the first train to enter the bi-directional section as soon as the first train has cleared the overlap beyond the first automatic signal in the section.

The signal at the opposite end of the bi-directional section controlling the entrance to the bidirectional section shall not be able to be cleared until all trains in the opposing direction have cleared the bi-directional section. (Opposing shunt signal moves may be permissible up to a train proved at stop at the home signal at the exit to the bidirectional section, where required)

8.1.4 Maintenance Releases

Maintenance releasing switches may be provided where necessary for maintenance staff protection and shall enable maintenance staff to block the reverse direction movements.

The routes controlling the reverse direction movements shall be proved normal and the section proved clear of all trains travelling in the reverse direction before the maintenance release can be operated and the reverse direction block enabled.

Three separate maintenance releasing switches, X, Y & Z may be provided to facilitate up to three independent maintenance crews. The removal of the key from any one of the releasing switches shall disable the reverse direction working on both lines in the double line section.

The location of the releasing switches shall be subject to their on-track accessibility with respect to the maintenance crew requirements.

8.1.5 Half – Pilot Staff Inscription

Details are required to be inscribed on half pilot staffs in bi-directional signaled areas similar to the following two examples:


CORRIMAL WG501D DOWN MAIN (to WOLLONGONG)	WOLLONGONG 466D DOWN MAIN (to CORRIMAL)	Name of the interlocking and Home/Starting or Starting Signal where half pilot staff located. Bi-directional line concerned Name of the interlocking at the opposite end of the bi-directional section
CORRIMAL WG503U UP MAIN (to WOLLONGONG)	WOLLONGONG 468U UP MAIN (to CORRIMAL)	

Half pilot staffs in bi-directional signalled areas are to be further individually identified by being coloured/banded yellow for the normal down direction line and blue for the normal up direction line.

The signal number is the normal Home/Starting Signal for the line concerned and also applies to other Home/Starting or Starting Signal(s) leading onto the bi-directional line concerned.

8.1.6 Pilot Staff Lock Designation Plate


Designation plates attached to Pilot Staff Locks are to be inscribed with details similar to the following two examples:

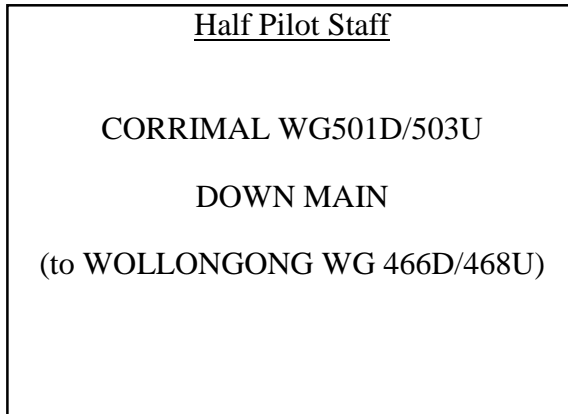

Name of the interlocking and Home Starting or Starting Signal(s) leading into the bi-directional line concerned

Bi-directional line concerned

Name of the interlocking at the opposite end of the bi-directional section and the opposing Home/Starting or Starting Signal(s) leading into the bi-directional line concerned

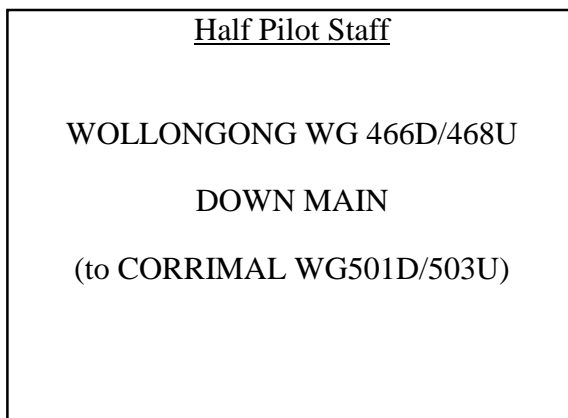

Pilot Staff Locks in bi-directional signalled areas are to be further individually identified by being coloured yellow for the normal down direction line and blue for the normal up direction line.